


THREE CORE, 12.7/22kV HEAVY DUTY SCREENED UNARMoured

MEDIUM VOLTAGE POWER CABLES

XLPE INSULATED COPPER WIRE SCREENED AND HDPE SHEATHED CABLE TO AS/NZS 1429.1

CABLE APPLICATION

Description
Mains enclosed in conduit, buried or underground ducts for industrial plants, buildings and transformers where not subject to mechanical damage.

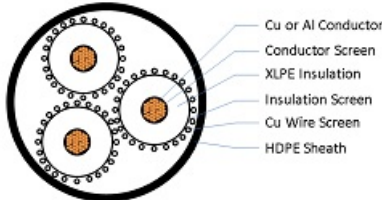

CABLE DESIGN

Conductor
Plain Annealed Copper or Aluminium to AS/NZS 1125
Insulation
X-90 XLPE to AS/NZS 3808
Sheath
HDPE to AS/NZS 3808

Note
** items can be supplied with compacted conductors to AS/NZS 1125
** items can be supplied with alternative stranding construction to AS/NZS 1125 - 7/19/37/61 strands
** overall dimensions may vary due to compacted conductors

COPPER CONDUCTOR, HIGH FAULT LEVEL

Part Number	Conductor			Cable				Conductor resistance (Max)			Short Circuit Rating	
	Nom. Area mm ²	Nom. Dia. mm	Nom. Insulation Thickness mm	Nom. Insulation Dia. mm	Nom. Screen Area mm ²	Nom. Sheath Thickness mm	Nom. Overall Dia. mm	Approx. Cable Weight Kg/m	DC at 20°C Ohm/km	AC at 90°C Ohm/km	Phase Conductor (one sec.) kA	Copper Wire Screen (one sec.) kA
HV19153C3C22HDPE 35**	7.1	5.5	19.9	12	2.7	56.5	3.4	0.524	0.668	5.0	5.1	
HV19178C3C22HDPE 50**	8.2	5.5	21.0	16	2.8	60.4	4.1	0.387	0.494	7.2	7.2	
HV19214C3C22HDPE 70**	9.8	5.5	22.6	23	2.9	64.1	5.1	0.268	0.342	10.0	10.3	
HV37178C3C22HDPE 95**	11.5	5.5	24.3	31	3.0	68.0	6.3	0.193	0.247	13.6	13.5	
HV37203C3C22HDPE 120**	12.9	5.5	25.7	31	3.1	71.2	7.3	0.153	0.196	17.2	13.5	
HV37225C3C22HDPE 150**	14.3	5.5	27.1	31	3.2	75.3	8.4	0.124	0.159	21.5	13.5	
HV37252C3C22HDPE 185**	16.1	5.5	28.9	31	3.3	79.3	9.7	0.0991	0.128	26.5	13.5	
HV61225C3C22HDPE 240**	18.3	5.5	31.1	31	3.5	84.4	11.7	0.0754	0.0981	34.3	13.5	
HV61252C3C22HDPE 300**	20.8	5.5	33.8	31	3.7	90.7	13.9	0.0601	0.0792	42.9	13.5	

12.7/22kV 3C, CU

ALUMINIUM CONDUCTOR, HIGH FAULT LEVEL

Part Number	Conductor			Cable				Conductor resistance (Max)			Short Circuit Rating	
	Nom. Area mm ²	Nom. Dia. mm	Nom. Insulation Thickness mm	Nom. Insulation Dia. mm	Nom. Screen Area mm ²	Nom. Sheath Thickness mm	Nom. Overall Dia. mm	Approx. Cable Weight Kg/m	DC at 20°C Ohm/km	AC at 90°C Ohm/km	Phase Conductor (one sec.) kA	Copper Wire Screen (one sec.) kA
HV19178A3C22HDPE 50**	8.2	5.5	21.0	11	2.8	60.4	3.0	0.641	0.822	4.7	4.3	
HV19214A3C22HDPE 70**	9.8	5.5	22.6	15	2.9	64.1	3.6	0.443	0.568	6.6	6.3	
HV37178A3C22HDPE 95**	11.5	5.5	24.3	21	3.0	68.0	4.2	0.320	0.411	9.0	8.9	
HV37203A3C22HDPE 120**	13.0	5.5	25.7	23	3.1	71.2	4.9	0.253	0.325	11.3	10.3	
HV37225A3C22HDPE 150**	14.3	5.5	27.1	26	3.2	75.3	5.6	0.206	0.265	14.2	10.3	
HV37252A3C22HDPE 185**	16.1	5.5	28.7	31	3.3	79.3	6.2	0.164	0.211	17.5	13.5	
HV61225A3C22HDPE 240**	18.3	5.5	31.1	31	3.5	84.4	7.1	0.125	0.161	22.7	13.5	
HV61252A3C22HDPE 300**	20.8	5.5	33.8	31	3.7	90.7	8.1	0.100	0.130	28.3	13.5	

12.7/22kV 3C, AL

CMI Head Office NSW | (02) 9807 6155 | F3, 3-29 Birnie Ave, Lidcombe, NSW, 2141 | nswsales@cmielectrical.com.au
CMI QLD-Brisbane
(07) 3863 0749
485A Zillmere Road,
Zillmere QLD 4034
southqdsales@cmielectrical.com.au

CMI QLD - Rockhampton
(07) 4921 0978
Shop 3 at 76 Hollingsworth Street,
North Rockhampton Qld 4701
northqdsales@cmielectrical.com.au

CMI VIC
(03) 9532 1233
3 Dissik Street,
Cheltenham VIC 3192
vicsales@cmielectrical.com.au

CMI WA
(08) 9358 1788
36 Division Street,
Welshpool WA 6106
wasales@cmielectrical.com.au