

F-RM Series Reducers

For Explosion Protected Applications

Nickel plated brass reducers are used for thread conversions and are available in a range of thread sizes.

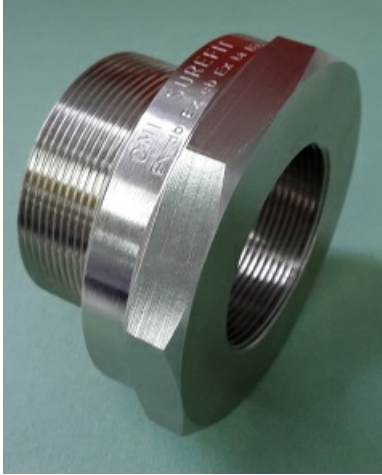


Table 1

Part Number	Male Thread Dia.	Female Thread Dia.	Across Corners	Across Flats	Max. Protrusion	Entry Thread Length	Sealing Washer	Locknut
F-RM2016	M20x1.5	M16x1.5	25.9	22.3	14.2	13.0	W20	PLN20
F-RM2520	M25x1.5	M20x1.5	33.1	28.5	15.2	15.0	W25	PLN25
F-RM3225	M32x1.5	M25x1.5	40.4	37.2	17.2	21.0	W32	PLN32
F-RM4032	M40x1.5	M32x1.5	61.3	56.5	17.2	21.0	W40	PLN40
F-RM5040	M50x1.5	M40x1.5	73.9	68.2	19.2	21.0	W50	PLN50

Fitting Instructions

Contact CMI Electrical for Fitting Instructions

Certifications

Compliance: Explosion protected to IEC60079 Series
 Protection: Ex db I/IIc, Ex eb I/IIc, Ex ta IIIc
 Materials: Brass Nickel Plated
 IP Rating: IP66/68 (7 Metres for 1 Hour)

CMI Head Office NSW | (02) 9807 6155 | F3, 3-29 Birnie Ave, Lidcombe, NSW, 2141 | nswsales@cmielectrical.com.au
CMI QLD-Brisbane
 (07) 3863 0749
 485A Zillmere Road,
 Zillmere QLD 4034
southqdsales@cmielectrical.com.au

CMI QLD – Rockhampton
 (07) 4921 0978
 Shop 3 at 76 Hollingsworth Street,
 North Rockhampton Qld 4701
northqdsales@cmielectrical.com.au

CMI VIC
 (03) 9532 1233
 3 Dissik Street,
 Cheltenham VIC 3192
vicsales@cmielectrical.com.au

CMI WA
 (08) 9358 1788
 36 Division Street,
 Welshpool WA 6106
wasaales@cmielectrical.com.au