


PVC INSULATED AND PVC SHEATHED CABLE TO AS/NZS 5000.2

CABLE APPLICATION

Description
For house wiring and subcircuits enclosed in conduit.

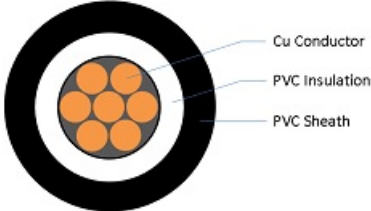

CABLE DESIGN

Conductor
 Plain Annealed Copper Conductor to AS/NZS 1125
Insulation
 V90 PVC to AS/NZS 3808
 Colours: Red, Black. Other colours made to order.
Sheath
 5V-90 PVC to AS/NZS 3808
 Colours: White. Other colours made to order.
Certification
 GMA-503281-EA

CHARACTERISTICS

Part Number	Conductor			Cable		
	Nom. Area mm ²	No. & Dia. of Wires No./mm	Nom. Insulation Thickness mm	Nom. Sheath Thickness mm	Nom. Overall Dia. mm	Approx. Mass Kg/100m
VV7050C	1.5	7/0.50	0.6	0.8	4.3	3.2
VV7067C	2.5	7/0.67	0.7	0.8	5.0	4.8
VV7085C	4.0	7/0.85	0.8	0.9	5.9	7.0
VV7104C	6.0	7/1.04	0.8	0.9	6.5	9.3
VV7135C	10.0	7/1.35	1.0	0.9	7.8	14.5

450/750V PVC 1C, CU

CMI Head Office NSW | (02) 9807 6155 | F3, 3-29 Birnie Ave, Lidcombe, NSW, 2141 | nswsales@cmielectrical.com.au
CMI QLD-Brisbane
 (07) 3863 0749
 485A Zillmere Road,
 Zillmere QLD 4034
southqldsales@cmielectrical.com.au

CMI QLD - Rockhampton
 (07) 4921 0978
 Shop 3 at 76 Hollingsworth Street,
 North Rockhampton Qld 4701
northqldsales@cmielectrical.com.au

CMI VIC
 (03) 9532 1233
 3 Dissik Street,
 Cheltenham VIC 3192
vicsales@cmielectrical.com.au

CMI WA
 (08) 9358 1788
 36 Division Street,
 Welshpool WA 6106
wasales@cmielectrical.com.au