


36 CORE FLEXIBLE TRAFFIC SIGNAL CABLE

STREET LIGHTING / TRAFFIC CONTROL CABLES

PVC/PVC 36 CORE (33 x 1.5mm² + 1 x 2.5mm² + 1 x 4.0mm² + 1 x 6.0mm²) CABLE 0.6/1KV TO AS2276.1

CABLE APPLICATION

Description
Connection of Traffic Light Signal Systems.

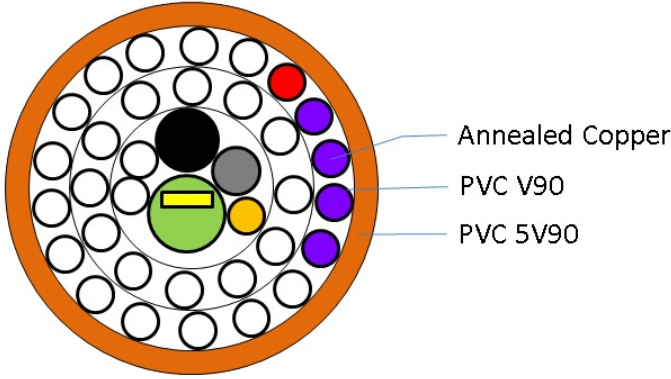

CABLE DESIGN

Conductor
Flexible plain annealed copper to AS/NZS 1125

Insulation
PVC V90 to AS/NZS 3808

Layup Construction
Central - 1 Core - Green/Yellow + 5 Cores - Black, Grey, Orange, White with Numbers(1-2) + filler
Mid - 12 Cores - White with Numbers (3-14)
Outer - 18 Cores White with Numbers (15-27), Violet with Numbers (P1-P4), Red
Diameter of Layup 26.3mm

Sheath
5V90 PVC to AS/NZS 3808 (Orange)

Certification
To Qld Mains Roads requirement MRTS 256 Certificate No. 17-06

CHARACTERISTICS

Part Number	Conductor			Insulation				Sheath		Conductor resistance (Max)		Approx. Cable Weight Kg/m
	No. of Core	Nom. Area mm ²	No. & Dia. of Wires No./mm	Nom. Dia. mm	Nom. Insulation Thickness mm	Min. Nom. Ins. Thickness mm	Nom. Insulation Dia. mm	Nom. Sheath Thickness mm	Min. Dia. over Ins. mm	Overall Sheath Dia.	DC at 20°C Ohm/km	
TFRCC36TRAFFIC 1	2.5	50/0.25	2.0	0.8	0.62	3.6	1.8	1.43	30.0	7.98	6.2	
1	4.0	56/0.30	2.6	1.0	0.8	4.6				4.95		
1	6.0	84/0.30	3.2	1.0	0.8	5.2				3.3		
33	1.5	30/0.25	1.6	0.8	0.62	3.2				13.3		

0.6/1KV, CU

CMI Head Office NSW | (02) 9807 6155 | F3, 3-29 Birnie Ave, Lidcombe, NSW, 2141 | nswsales@cmielectrical.com.au
CMI QLD-Brisbane
 (07) 3863 0749
 485A Zillmere Road,
 Zillmere QLD 4034
southqldsales@cmielectrical.com.au

CMI QLD – Rockhampton
 (07) 4921 0978
 Shop 3 at 76 Hollingsworth Street,
 North Rockhampton Qld 4701
northqldsales@cmielectrical.com.au

CMI VIC
 (03) 9532 1233
 3 Dissik Street,
 Cheltenham VIC 3192
vicsales@cmielectrical.com.au

CMI WA
 (08) 9358 1788
 36 Division Street,
 Welshpool WA 6106
walesales@cmielectrical.com.au