


51 CORE TRAFFIC SIGNAL CABLE

STREET LIGHTING / TRAFFIC CONTROL CABLES

PVC/PVC 51 CORE (48 x 1.5mm² + 3 x 4.0mm²) CABLE 0.6/1KV TO AS2276.1

CABLE APPLICATION

Description
 Connection of Traffic Light Signal Systems.

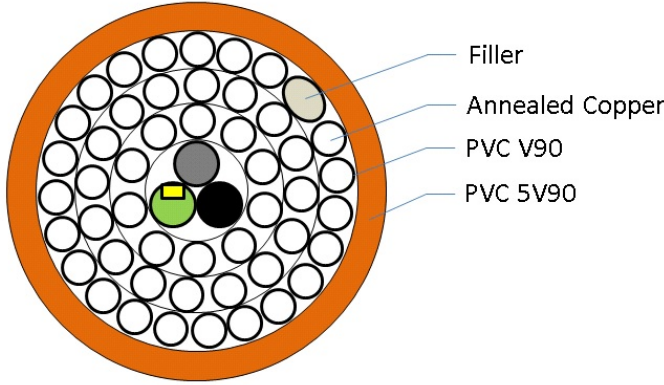

CABLE DESIGN

Conductor
 Plain annealed Copper to AS/NZS 1125
Insulation
 PVC V90 to AS/NZS 3808
Layup Construction
 Central - 3 Cores - Black, Grey, Green/Yellow
 Inner - 10 Cores White with Numbers (1-10)
 Mid - 16 Cores - White with Numbers (11-26)
 Outer - 22 Cores White with Numbers (27-48)
 Diameter of Layup 28.5mm
Sheath
 5V90 PVC to AS/NZS 3808 (Orange)
Certification
 To Old Mains Roads requirements MRTS 256

CHARACTERISTICS

Part Number	Conductor			Insulation				Sheath		Conductor resistance (Max)	Weight	
	No. of Core	Nom. Area mm ²	No. & Dia. of Wires No./mm	Nom. Dia. mm	Nom. Insulation Thickness mm	Min. Nom. Ins. Thickness mm	Nom. Insulation Dia. mm	Nom. Sheath Thickness mm	Min. Dia. over Ins. mm	Overall Sheath Dia.	DC at 20°C Ohm/km	Approx. Cable Weight Kg/m
TFRCC51CTRAFFIC 3	4.0	7/0.85	2.5	1.0	1.0	0.8	4.6	2.0	1.6	32.5	4.61	10.2
	48	1.5	7/0.50	1.5	0.8	0.62	3.1				13.6	

0.6/1KV, CU

CMI Head Office NSW | (02) 9807 6155 | F3, 3-29 Birnie Ave, Lidcombe, NSW, 2141 | nswsales@cmielectrical.com.au
CMI QLD-Brisbane
 (07) 3863 0749
 485A Zillmere Road,
 Zillmere QLD 4034
southqldsales@cmielectrical.com.au

CMI QLD - Rockhampton
 (07) 4921 0978
 Shop 3 at 76 Hollingsworth Street,
 North Rockhampton Qld 4701
northqldsales@cmielectrical.com.au

CMI VIC
 (03) 9532 1233
 3 Dissik Street,
 Cheltenham VIC 3192
vicsales@cmielectrical.com.au

CMI WA
 (08) 9358 1788
 36 Division Street,
 Welshpool WA 6106
wasaless@cmielectrical.com.au